
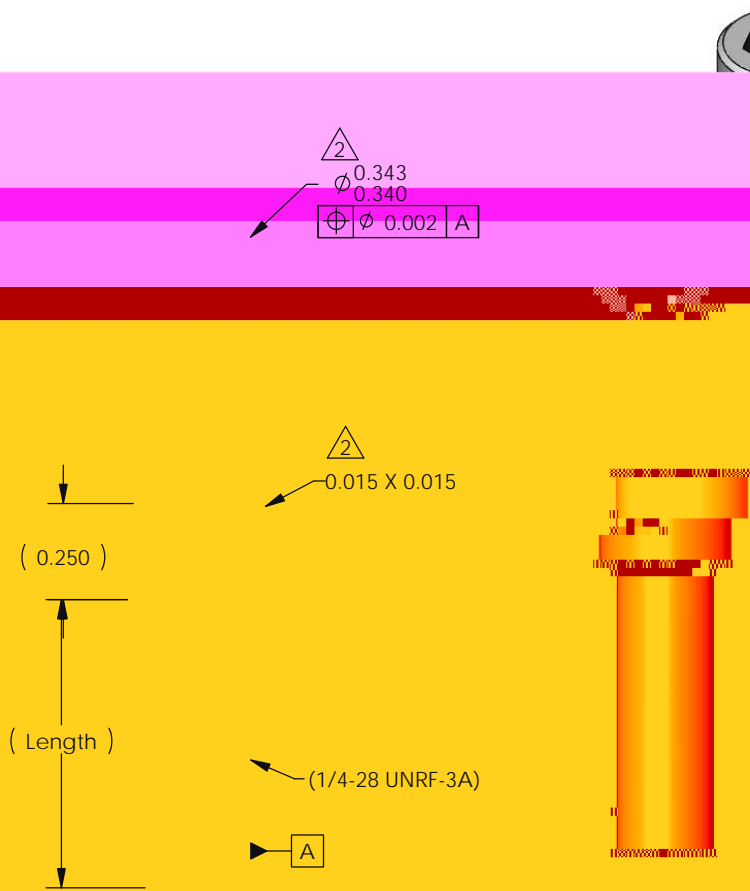


REVISIONS				
Rev	Change Description	Date	By	Chk
-	Initial Revision	21-Oct-13	RH	RW

- Material: A-286 Alloy, NAS1351N4-XX SHC Screw
-  Reduce head diameter and add chamfer as shown.
- De-burr and break sharp edges.
- Surface Finish: None.
- Cleanliness: Part must be delivered COMPLETELY free of all grease, oil and grit.

Dash	Length
6	0.375
8	0.500
10	0.625
12	0.750
14	0.875
16	1.000
20	1.250
24	1.500
28	1.750
32	2.000
36	2.250



**PROPRIETARY & CONFIDENTIAL**  
 The information contained in this drawing, or any reproduction thereof, is proprietary information and the property of PSC. It shall not be disclosed, copied, duplicated or used for manufacture, production, or procurement, without PSC's express written permission.  
 2303 Kansas Avenue, Silver Spring, MD 20910 | (301) 495-0737

ALL DIMENSIONS ARE IN INCHES

TOLERANCES:  
 x.xxxx +/- 0.001  
 x.xx +/- 0.010  
 x.x +/- 0.030



DESIGN	RH	
Material:		
DO NOT SCALE		4000845-X
CAGE CODE: 1PHA7		SHEET 1 OF 1